

# CBCS SCHEME

USN

--	--	--	--	--	--	--	--	--	--

15AU34

## Third Semester B.E. Degree Examination, Aug./Sept.2020 Mechanics of Materials

Time: 3 hrs.

Max. Marks: 80

*Note: Answer any FIVE full questions, choosing ONE full question from each module.*

### Module-1

- 1 a. Define following :  
 (i) Elasticity      (ii) Ductility      (iii) Toughness      (iv) Stiffness      (08 Marks)
- b. Derive the expression for total extension of tapered circular bar.      (08 Marks)

OR

- 2 a. Explain generalized Hooke's law and define Bulk modulus and Elastic modulus.      (08 Marks)
- b. Determine total extension of bar and stress in each part.  
 $E = 84 \text{ GPa}$ , Cross-section =  $300 \text{ mm}^2$  [Refer Fig.Q2(b)].

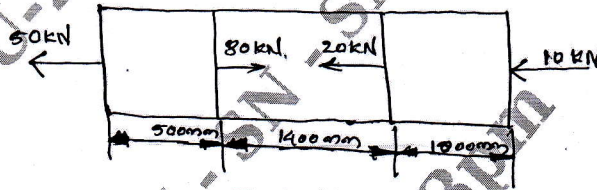


Fig.Q2(b)

(08 Marks)

### Module-2

- 3 a. Derive expression for member subjected to direct stresses on two mutually perpendicular directions.      (08 Marks)
- b. A point in a strained material, the stress on two planes at right angles to each other are  $80 \text{ N/mm}^2$  (Tensile) and  $40 \text{ N/mm}^2$  (tensile). Each of the above stresses is accompanied by a shear stress of  $60 \text{ N/mm}^2$ . Determine Normal stress, Shear stress and resultant stress on an oblique plane inclined at an angle of  $45^\circ$  to the axis of minor tensile stress. Also find major principal stress, minor principal stress and their location, maximum shear stress and its location.      (08 Marks)

OR

- 4 a. Derive equation for circumferential and longitudinal stress for thin cylinder.      (08 Marks)
- b. A pipe of  $500 \text{ mm}$  internal diameter and  $75 \text{ mm}$  thick is filled with fluid at a pressure of  $6 \text{ N/mm}^2$ . Find maximum, minimum Hoop stresses across the cross-section of cylinder. Draw pressure and stress distribution.      (08 Marks)

### Module-3

- 5 a. Draw shear force diagram and bending moment diagram for cantilever beam as shown in Fig.Q5(a) locate contraflexure point.




Fig.Q5(a)

(10 Marks)

- b. Explain types of beam and types of load.      (06 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and/or equations written eg.  $42+8=50$ , will be treated as malpractice.

OR

- 6 a. Derive relationship between bending stress and radius of curvature. (08 Marks)  
 b. The cross section of beam as shown in Fig.Q6(b). If permissible stress is  $150 \text{ N/mm}^2$ . Find its moment of resistance compare it with equivalent section of same area for a square section.

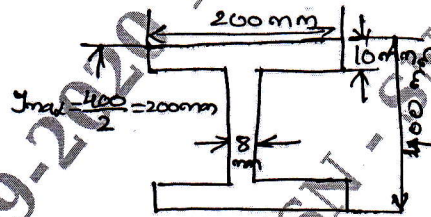


Fig.Q6(b)

(08 Marks)

Module-4

- 7 a. Establish the relation between torque and stress in solid circular shaft. (08 Marks)  
 b. A solid shaft is subjected to maximum torque of  $25 \text{ kNm}$ . Find suitable diameter of solid shaft, if allowable shear stress and twist are limited to  $80 \text{ N/mm}^2$  and  $1^\circ$  respectively for length of 20 times the diameter. (08 Marks)

OR

- 8 a. Derive the expression for Euler's crippling load when both the ends of column are hinged. (08 Marks)  
 b. A solid round bar of  $60 \text{ mm}$  diameter and  $2.5 \text{ m}$  is used as a strut find the safe compressive load for the strut if both ends are hinged and both end fixed. Take  $E = 2 \times 10^5 \text{ N/mm}^2$ , FOS = 3. (08 Marks)

Module-5

- 9 a. Explain Castigliano's theorem I and II of strain energy. (08 Marks)  
 b. Derive expression for strain energy due to bending. (08 Marks)

OR

- 10 a. Explain maximum principal stress theory and maximum shear stress theory of failure. (08 Marks)  
 b. A solid circular shaft is subjected to a bending moment of  $40 \text{ kN-m}$  and a torque of  $10 \text{ kN-m}$ . Design the diameter of the shaft according to (i) Maximum principal stress theory (ii) Maximum shear stress theory. Take  $\mu = 0.25$ , Stress of elastic limit =  $200 \text{ N/mm}^2$ , FOS = 2. (08 Marks)

\*\*\*\*\*