

USN

--	--	--	--	--	--	--	--	--	--

10ES36

Third Semester B.E. Degree Examination, Dec.2016/Jan.2017
Field Theory

Time: 3 hrs.

Max. Marks:100

**Note: Answer FIVE full questions, selecting
at least TWO questions from each part.**

PART – A

- 1 a. State Coulombs law for the Force between any two point charges and indicate the units of Quantities in the force equation. (06 Marks)
 b. On the line described by $x = 2m$, $y = -4m$ there is uniform charge distribution of density $\rho_L = 20$ nc/m. Determine Electric field at $P(-2, -1, 4)m$. (04 Marks)
 c. State and prove Gauss – Divergence theorem. (10 Marks)
- 2 a. Given the potential field $V = (50x^2yz + 20y^2)$ Volts in free space. Find : i) V at $P(-2, 3, 6)$ ii) \vec{E}_p and iii) \hat{a}_r at P (06 Marks)
 b. Derive an expression for energy expended by moving a point charge arbitrarily in an uniform electric field. (06 Marks)
 c. Derive Laplace and Poisson's equations starting from the differential form of Gauss law. Express Laplace equation in all the three co-ordinate systems. (08 Marks)
- 3 a. Derive expression for energy stored in a capacitor and an expression after energy density in an electrostatic field. (08 Marks)
 b. In cylindrical coordinate system planes are insulated along 'z' axis as shown in Fig 3(b). Neglect fringing effect and find expressions for \vec{E} between the planes assuming a potential of 100V for $\phi = \alpha$ and a zero reference at $\phi = 0$. (06 Marks)

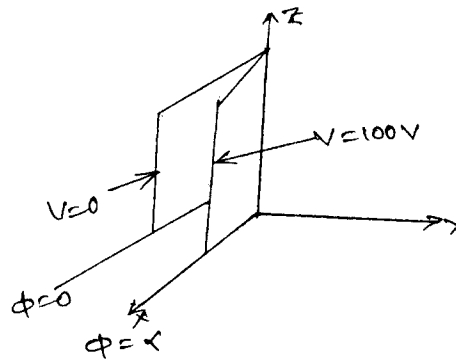


Fig Q3(b)

- c. State and prove uniqueness theorem. (06 Marks)
- 4 a. An air cored torroid having a cross sectional area of $6cm^2$ and mean radius 15cm is wound uniformly with 500 turns carrying a current of 4A. Determine the magnetic flux density and field intensity of torroid. (06 Marks)
 b. Derive an expression for Magnetic flux density at any point on the axis of Solenoid. (08 Marks)
 c. State and explain Amperes circuital law. (06 Marks)

PART – B

- 5 a. Explain the concept of scalar and vector magnetic potential. (08 Marks)
 b. Derive the boundary conditions at the interface between two different magnetic materials. (06 Marks)
 c. Find the magnetic field intensity at the point P for the Fig Q5(c) shown below. (06 Marks)

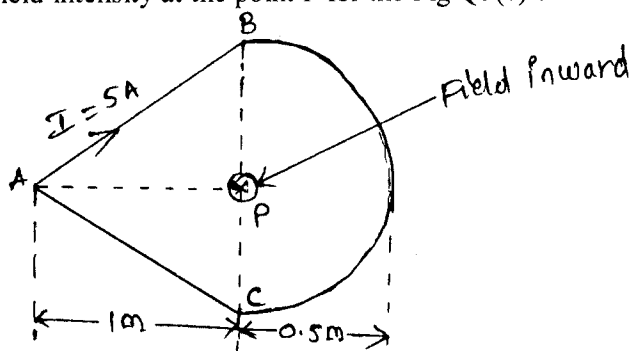


Fig Q5(c)

- 6 a. List out Maxwell's equations in point and integral forms for both static and time varying fields. (08 Marks)
 b. Describe the continuity equation of current in differential form. (06 Marks)
 c. Show that conduction current in the wire is equal to the displacement current in the dielectric of a capacitor subjected to a time varying field. (06 Marks)
- 7 a. Explain how uniform plane wave is transverse in nature. Describe the skin depth or depth of penetration. (10 Marks)
 b. A wave propagating in a Lossless dielectric has the Components.
 $\vec{E} = 500 \cos[10^7 t - \beta z] \hat{a}_z$ V/m and $\vec{H} = 1.1 \cos[10^7 t - \beta z] \hat{a}_y$ A/m of the wave is travelling at $V = 0.5C$. Find : i) μ_r ii) ϵ_r iii) β iv) λ v) z . (10 Marks)
- 8 a. Derive the expressions for transmission co-efficient and reflection co-efficient of a uniform plane wave for normal incidence. (10 Marks)
 b. Define SWR and derive the relationship between SWR and reflection coefficient. (10 Marks)

* * * * *