



- c. A 12 mm diameter mild steel sphere at  $540^{\circ}\text{C}$  is exposed to cooling air flow at  $27^{\circ}\text{C}$  and heat transfer coefficient of  $114 \text{ W/m}^2\text{-K}$ . Find:
- The time required to cool the sphere from  $540^{\circ}\text{C}$  to  $95^{\circ}\text{C}$
  - Instantaneous heat transfer rate, two minutes after start of cooling
  - Total heat transferred from the sphere during first two minutes.
- Properties of mild steel are:  $\rho = 7850 \text{ kg/m}^3$ ,  $C = 475 \text{ J/kg-K}$  and  $\alpha = 0.045 \text{ m}^2/\text{hr}$ .

(08 Marks)

**Module-3**

- 5 a. Why numerical methods are preferred over analytical methods? List the numerical methods which are used in solving heat conduction problems. (04 Marks)
- b. The boundary temperatures of a thin plate are as shown in Fig.Q5(b). Determine the temperature at the centre of the plate.

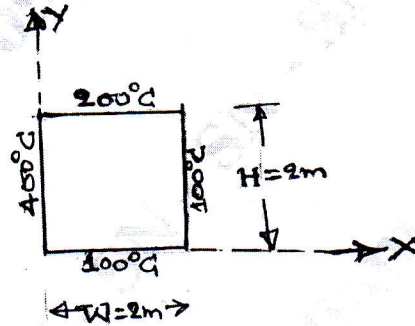


Fig.Q5(b)

(06 Marks)

c. Explain:

- Kirchhoff's law
- Plank's law
- Wien's displacement law

(06 Marks)

**OR**

- 6 a. How is Laplace equation for 2D heat conduction approximated to the finite difference equations? (08 Marks)
- b. Calculate the net radiant heat exchange per unit area for two large parallel plates at temperature of  $427^{\circ}\text{C}$  and  $27^{\circ}\text{C}$  respectively. Take emissivity of hot plate and cold plates are 0.9 and 0.6 respectively. If a polished aluminium shield is placed between them, find percentage reduction in the heat transfer. Take emissivity of shield as 0.4. (08 Marks)

**Module-4**

- 7 a. With the help of dimensional analysis obtain the fundamental relation between dimensionless numbers required for
- Forced convection
  - Natural convection. (10 Marks)
- b. Water at a velocity of  $1.5 \text{ m/s}$  enters a  $2 \text{ cm}$  diameter heat exchanger tube at  $40^{\circ}\text{C}$ . The heat exchanger tube wall is maintained at a temperature of  $100^{\circ}\text{C}$ . If the water is heated to a temperature of  $80^{\circ}\text{C}$  in the heat exchanger tube, find the length of the exchanger tube required. (06 Marks)

**OR**

- 8 a. Define and explain the physical significance of the following dimensionless numbers:  
(i) Grashoff number (04 Marks)  
(ii) Reynolds number (04 Marks)
- b. For fluid flow over a flat plate, sketch (i) Velocity boundary layer (ii) Thermal boundary layer. Clearly mention salient points on the figure. (04 Marks)
- c. A tube of 0.036 m OD and 40 cm length is maintained at a uniform temperature of 100°C. It is exposed to air at a uniform temperature of 20°C. Determine the rate of heat transfer from the surface of the tube when (i) the tube is vertical (ii) the tube is horizontal. (08 Marks)

**Module-5**

- 9 a. What is the importance of NTU effectiveness method? Derive an expression for the effectiveness of a parallel flow heat exchanger. (08 Marks)
- b. Sketch pool boiling curve for water and explain the various regimes in boiling heat transfer. (08 Marks)

**OR**

- 10 a. List the assumptions made in Nusselt's theory of laminar film condensation on a plane vertical surface. (04 Marks)
- b. Saturated steam at 80°C condenses as a film on a vertical plate at a temperature of 70°C. Calculate the average heat transfer coefficient and the rate of steam condensation per hour. Assume that the latent heat of vaporization at 80°C is 2309 kJ/kg. (06 Marks)
- c. An oil cooler for a large diesel engine is to cool engine oil from 60 to 45°C using sea water at an inlet temperature of 20°C with a temperature rise of 15°C. The design load  $Q = 140$  KW and the mean overall heat transfer coefficient based on the outer surface area of the tubes is 70 W/m<sup>2</sup>°C. Calculate the heat transfer surface area for single pass counter flow and parallel flow arrangement. (06 Marks)

\* \* \* \* \*