

CBCS SCHEME

USN

--	--	--	--	--	--	--	--	--	--

15ME73

Seventh Semester B.E. Degree Examination, June/July 2023

Control Engineering

Time: 3 hrs.

Max. Marks: 80

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Define control system. Explain open and closed loop control systems with examples. (08 Marks)
- b. With block diagram, explain:
 - i) Proportional controller
 - ii) Integral controller
 - iii) Proportional plus differential controller. (08 Marks)

OR

- 2 a. List the advantages and disadvantages of open loop and closed loop control system. (08 Marks)
- b. Explain requirements of automatic control system. (08 Marks)

Module-2

- 3 a. Obtain the transfer function for an armature controlled D.C motor, which relates output angular displacement (Q) with input voltage (e). (08 Marks)
- b. A thermometer is dipped in a vessel containing liquid at a constant temperature of θ_1 . thermometer has a thermal capacitance for storing heat as C and thermal resistance to limit heat flow as R . If the temperature indicated by thermometer is θ_r , obtain the transfer function of the system. (08 Marks)

OR

- 4 a. Obtain the overall transfer function of the block diagram shown in Fig.Q4(a) by reduction technique. (10 Marks)

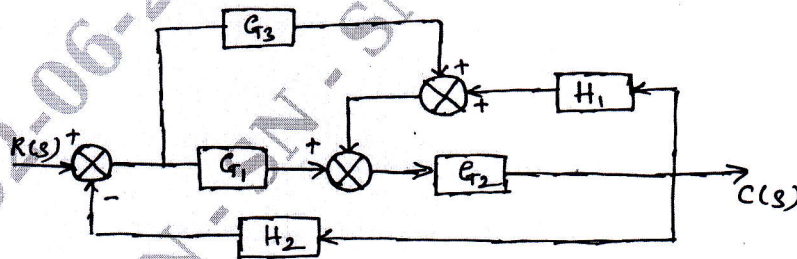


Fig.Q4(a)

- b. Discuss Mason's gain formula and define the following terms used in signal flow graphs.
 - (i) Node
 - (ii) Branch gain
 - (iii) Forward path
 - (iv) Path gain
 - (v) Feedback loop
 - (vi) Self loop(06 Marks)

Module-3

- 5 a. Derive an expression for unit step response of first order system. (06 Marks)
 b. The unity feedback system characterized by an open loop transfer function

$$G(s) = \frac{K}{S(S+10)}. \text{ Determine the gain } K, \text{ so that the system will have a damping ratio } 0.5$$

for this value of K. Determine Settling time, Rise time, Peak overshoot and Peak time for unit step input. (06 Marks)

- c. Using Routh Criteria, determine stability of a system its characteristic equation is $S^4 + 8S^3 + 18S^2 + 16S + 5 = 0$. (04 Marks)

OR

- 6 Sketch the root locus of the system whose open loop transfer function is

$$G(S) H(S) = \frac{K}{S(S+2)(S+4)}. \quad (16 \text{ Marks})$$

Module-4

- 7 Draw the Bode plot for the following transfer function and determine gain margin and phase margin.

$$G(s)H(s) = \frac{10.5}{(s+0.2)(s+0.8)(s+10)} \quad (16 \text{ Marks})$$

OR

- 8 Using Nyquist criterion, investigate the stability of a system whose open loop transfer function is $G(s)H(s) = \frac{k}{(s+1)(s+2)(s+3)}$ (16 Marks)

Module-5

- 9 a. Explain the following: i) Lead Compensator ii) Lag compensator. (06 Marks)
 b. If the system is described by:

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} u \quad ; \quad Y = [20 \ 9 \ 1] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

Check System Completely State Controllable and Completely Observable. Use Kalman's method. (10 Marks)

OR

- 10 a. Choosing suitable state variable, construct a state model for a spring, mass and damper system. (07 Marks)
 b. Determine the state controllability and observability of the system described by

$$\dot{x} = \begin{bmatrix} -3 & 1 & 1 \\ -1 & 0 & 1 \\ 0 & 0 & 1 \end{bmatrix} x + \begin{bmatrix} 0 & 1 \\ 0 & 0 \\ 2 & 1 \end{bmatrix} u \quad ; \quad Y = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 1 & 0 \end{bmatrix} x \quad (09 \text{ Marks})$$
