

USN

|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|

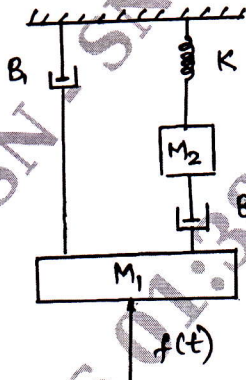
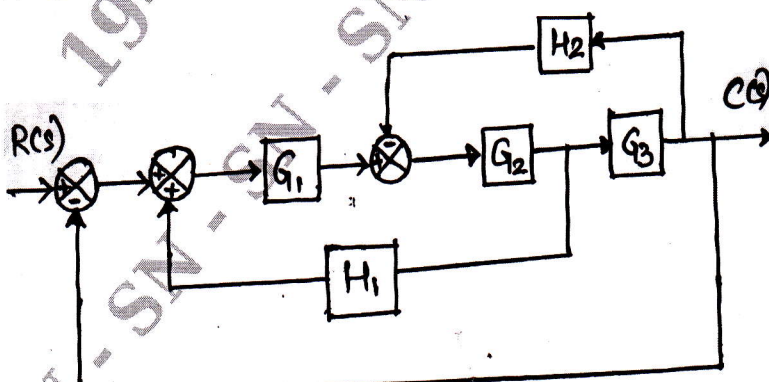
BAE703/BAS703

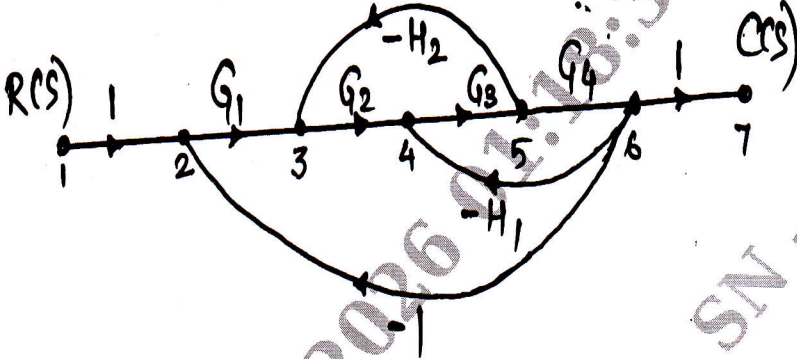
## Seventh Semester B.E./B.Tech. Degree Examination, Dec.2025/Jan.2026 Control Engineering

Time: 3 hrs.

Max. Marks: 100

*Note: 1. Answer any FIVE full questions, choosing ONE full question from each module.  
2. M : Marks , L: Bloom's level , C: Course outcomes.*

| Module – 1 |    |                                                                                                                                                                   |  | M  | L  | C   |
|------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|----|-----|
| Q.1        | a. | Distinguish between open loop and closed loop control system with examples.                                                                                       |  | 6  | L1 | CO1 |
|            | b. | Describe the requirement of an ideal control system.                                                                                                              |  | 6  | L2 | CO1 |
|            | c. | Explain the concept of feedback control system with basic structures. List its effect on control system.                                                          |  | 8  | L2 | CO1 |
| OR         |    |                                                                                                                                                                   |  |    |    |     |
| Q.2        | a. | Draw the equivalent mechanical system of the given system. Hence write the sets of equilibrium conditions for it and obtain analogous circuits using F-V analogy. |  | 10 | L2 | CO1 |
|            |    |  <p style="text-align: center;">Fig Q2(a)</p>                                   |  |    |    |     |
|            | b. | Derive the transfer function of an armature controlled DC motor.                                                                                                  |  | 10 | L3 | CO1 |
| Module – 2 |    |                                                                                                                                                                   |  |    |    |     |
| Q.3        | a. | Obtain the overall transfer function of the block diagram shown in Fig Q3(a) by reducing technique.                                                               |  | 10 | L3 | CO2 |
|            |    |  <p style="text-align: center;">Fig Q3(a)</p>                                 |  |    |    |     |

|                                                                                                                                 |    |                                                                                                                                                                                                                                                                             |    |    |     |
|---------------------------------------------------------------------------------------------------------------------------------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|-----|
|                                                                                                                                 | b. | Determine the overall gain $C(S) / R(S)$ , for the signal flow graph shown in Fig Q3(b).                                                                                                                                                                                    | 10 | L3 | CO2 |
|  <p style="text-align: center;">Fig Q3(b)</p> |    |                                                                                                                                                                                                                                                                             |    |    |     |
| <b>OR</b>                                                                                                                       |    |                                                                                                                                                                                                                                                                             |    |    |     |
| Q.4                                                                                                                             | a. | Obtain an expression for the time response of the first order system subjected to unit step input.                                                                                                                                                                          | 10 | L3 | CO2 |
|                                                                                                                                 | b. | Measurement conducted on a servo mechanism show that the system response to be $c(t) = 1 + 0.2 e^{-60t} - 1.2e^{-10t}$ , when subjected to step input. Obtain the expression for closed loop transfer function. Determine the undamped natural frequency and damping ratio. | 10 | L3 | CO2 |
| <b>Module – 3</b>                                                                                                               |    |                                                                                                                                                                                                                                                                             |    |    |     |
| Q.5                                                                                                                             | a. | The characteristics equation of a feedback control system is $s^4 + 20ks^3 + 5s^2 + 10s + 15 = 0$ . Find the range of k for which system is stable.                                                                                                                         | 10 | L3 | CO3 |
|                                                                                                                                 | b. | Sketch the root locus for a negative feedback control system having an open loop transfer function.<br>$G(s) H(s) = \frac{K}{s(s^2 + 6s + 10)}$                                                                                                                             | 10 | L3 | CO3 |
| <b>OR</b>                                                                                                                       |    |                                                                                                                                                                                                                                                                             |    |    |     |
| Q.6                                                                                                                             |    | Sketch the Bode plot for $G(s) H(s) = \frac{2}{s(1+s)(1+0.2s)}$ . Also obtain Gain Margin, Phase Margin and Cross Over Frequencies.                                                                                                                                         | 20 | L3 | CO3 |
| <b>Module – 4</b>                                                                                                               |    |                                                                                                                                                                                                                                                                             |    |    |     |
| Q.7                                                                                                                             | a. | For a standard second order system. derive the expression for the following:<br>i) Resonant peak<br>ii) Resonant frequency                                                                                                                                                  | 10 | L3 | CO3 |
|                                                                                                                                 | b. | Plot the polar plot for the open loop transfer function of a unity feedback and determine the phase margin and gain margin.<br>$G(s) = \frac{10}{s(s+1)(s+2)}$                                                                                                              | 10 | L3 | CO3 |

| OR         |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                |    |    |     |
|------------|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|-----|
| Q.8        |    | Construct Nyquist plot for a feedback control system whose open loop transfer function is given by $G(s) = \frac{5}{s(1-s)}$ . Comment on the stability of open loop and closed loop system.                                                                                                                                                                                                                                                   | 20 | L3 | CO3 |
| Module – 5 |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                |    |    |     |
| Q.9        | a. | Briefly explain with block diagram proportional Plus Integral Plus Derivative (PID) and state its characteristics of this controller.                                                                                                                                                                                                                                                                                                          | 10 | L2 | CO1 |
|            | b. | Explain the lead and lag compensator in control system.                                                                                                                                                                                                                                                                                                                                                                                        | 10 | L2 | CO1 |
| OR         |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                |    |    |     |
| Q.10       | a. | Write short notes on state equations and state variable representation.                                                                                                                                                                                                                                                                                                                                                                        | 10 | L2 | CO1 |
|            | b. | Consider the system with state equation<br>$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ -2 & -3 & 0 \\ 0 & 2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 2 \\ 0 \end{bmatrix} [u]$<br>$y = [1 \ 0 \ 0] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$<br>Determine the controllability and observability of the system using Kalman Test. | 10 | L3 | CO1 |

\*\*\*\*\*